

## FORM OF BID

Bid Reference No. Construction of additional work of Boundary Wall 1646 Rft along Railway Side and Gird Station at Residential Block of at MUET, Shaheed Z.A Campus Khairpur Mir's.

To:

Project Director  
MUET, Shaheed Z.A. Bhatti Campus  
Khairpur Mir's

1. Having examined the bidding documents including Instructions to Bidders, Bidding Data, and Conditions of Contract, Specifications, Drawings and Bill of Quantities and Addenda Nos. \_\_\_\_\_ for the execution of the above-named work, we/I, the undersigned, offer to execute and complete the work and remedy any defects therein in conformity with the Conditions of Contract, Specifications, Drawings, Bill of Quantities and Addenda for the sum of Rs. \_\_\_\_\_ (Rupees \_\_\_\_\_) or such other sum as may be ascertained in accordance with the said conditions.
  2. We/I understand that all the Appendices attached hereto form part of this bid.
  3. As security for due performance of the undertakings and obligations of this bid, we/I submit herewith a bid security in the amount of Rupees Eight hundred thousand. (Rs. 800,000/-) drawn in your favour or made payable to procuring agency and valid for a period of \_\_\_\_\_ days beginning from the date, bid is opened.
  4. We/I undertake, if our bid is accepted, to commence the works and to complete the whole of the works comprised in the contract within the time stated in Appendix-A to Bid.
  5. We/I agree to abide by this bid for the period of \_\_\_\_\_ days from the date fixed for opening the same and it shall remain binding upon us and may be accepted at any time before the expiration of that period.
  6. Unless and until a formal Agreement is prepared and executed, this bid, together with your written acceptance thereof, shall constitute a binding contract between us.
  7. We do hereby declare that the bid is made without any collusion, comparison of figures or arrangement with any other bidder for the works.
- We understand that you are not bound to accept the lowest or any bid you may receive.
8. We undertake, if our/my bid is accepted; to execute the Performance Security referred to in Clause 10 of Conditions of Contract for the due performance of the Contract.
  9. We confirm, if our bid is accepted, that all partners of the joint venture shall be liable jointly and severally for the execution of the Contract and the composition or the constitution of the joint

*[Handwritten signatures and stamps at the bottom of the page]*

*[Circular stamp: M/S. REHMAN BUILDERS, RB, HYDERABAD]*

venture shall not be altered without the prior consent of the procuring agency. (Please delete this in case of Bid form a single bidder)


in the capacity of \_\_\_\_\_ duly authorized to sign Bids for and on behalf of

Dated this 04<sup>th</sup> day of July 2017  
Signature: \_\_\_\_\_

(Name of Bidder in Block Capitals)

(Seal)

Address: B-9/A, S.I.T.E. Area,  
KOTRI



Witness:

Signature: \_\_\_\_\_

Name: Shaukat Ali

Address: D-14, Site Area Kotri

Occupation: Consultant

*[Handwritten signature]*

*[Handwritten signature]*  
5/7/17

*[Handwritten signature]*

*[Handwritten signature]*

*[Handwritten signature]*



### BILL OF QUANTITIES COMMULATIVE SUMMARY OF BID

CONSTRUCTION OF ADDITIONAL WORK OF BOUNDARY WALL 1646 RFT ALONG RAILWAY SIDE AND GIRD STATION AT RESIDENTIAL BLOCK OF AT MUET, SHAHEED Z.A CAMPUS KHAIRPUR MIR'S.

S. No.	DESCRIPTION	AMOUNT (Rs.)	
i	Cost of Civil Work Schedule Items	Rs.	13068218/- ✓
ii	Cost of Civil Work Non Schedule Items	Rs.	2408980/- ✓
	Grand Total in Rs.	Rs.	15477208/- ✓

In words :

Note :

Cartage shall not be payable separately and that the bid offered, it including of cartage.

Any difference on steel, cement, Bitumen, wood and bricks it notified by Government of Sindh after opening this bid shall be payable based on executed quantities.

If any extra item is required execution preference will be given to Govt. of Sindh Schedule of rates.

Signature of Bidder

*Economic Delivery Details*

Cashier's Cheque No. 11602984

Rs. 800000/-

Issued by: UBL, SITE. KOTRI BR.

Dated: 04-07-2017.









Seal of Bidder

## Schedule- B

### Part-I Civil Work Schedule Items



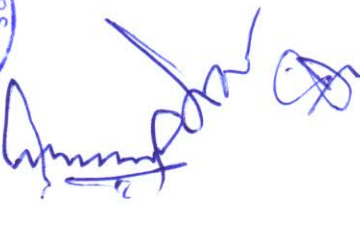
S-No	Descriptions	Unit	Rate	Qty	Amount
1	Excavation in foundation of building bridges and other structures including dagbelling dressing, refilling around structure with excavated earth Watering and ramming lead upto 5 ft. (b) In Ordinary soil. (GSI# 18, P# 4)	%o Cft	3,176.25	2259.00	7,175.15
2	Dry rammed brick or stone ballast 1-1/2" to 2" gauge. (GSI# 2, P# 14)	% Cft	3,327.50	890.00	29,614.75
3	Pacca brick work in foundation and plinth (e) cement sand mortar 1:6 (GSI# 4 I, P# 19)	% Cft	11,948.36	2236.00	267,165.33
4	Extra labour rate for making cement plaster pattas/band around straight or carved openings and around the edges of roof slabs, the width not less than 6" with fine finishing as directed by Engineer Incharge. (GSI# 35, P# 55)	P-Rft	19.36	4018.00	77,788.48
5	Cement concrete plain including placing compacting, finishing and curing, complete (including screening and washing of stone aggregates without shuttering) (I) Ratio 1:4:8 (GSI # 5(i), P# 15)	% Cft	11,288.75	1140.00	128,691.75
6	Reinforcement concrete work including all labour and material except the cost of steel reinforcement and its labour for bending and binding which will be paid separately. This rate also includes all kinds of forms, moulds, lifting shuttering, curing, rendering and finishing the exposed surface (including Screening and washing of shingle) RCC work in roof slab, beams, columns, rafts, lintels and other structural members laid in situ or pre-cast laid in position complete in all respects. (I) Ratio 1:2:4 90 lbs cement 2 Cft sand, 4 Cft shingle 1/8" to 1/4" gauge . (GSI # 6 (a), P# 15)	P-Cft	337.00	15589.00	5,253,493.00
7	Fabrication of mild steel reinforcement for cement concrete including cutting, bending, laying in position , making joints and fastenings including cost of binding wire (also includes removal of rust from bars).(b) using Tor bars. (GSI # 8(ii) b, P# 16).	P-Cwt	5,001.70	625.00	3,126,062.50



S-No	Descriptions	Unit	Rate	Qty	Amount
8	Applying Floating coat of cement 1/32" thick (GSI#4, Page#52).	% Sft	660.00	47514.00	313,592.40
9	Cement Plaster 1:4 upto 12 ft Height (b) 1/2"thick (GSI #11(b) P-51	% Sft	2,283.93	47514.00	1,085,186.50
10	Cement Plaster 1:4 upto 12' height (a) 3/8" thick (GSI #11(a), P# 51).	% Sft	2,197.52	47514.00	1,044,129.65
11	Preparing the surface and painting with weather coat I/c rubbing the surface with rubbing brick / sand Paper, filling the voids with chalk/ plaster of Paris and then painting with weather coat of approved make. (GSI # 38 A P-55) (ICI OR equivalent:)	% Sft	1,328.25	47514.00	631,104.71
12	a) 2nd & subsequent coat (GSI # 36 B P-54) (ICI OR equivalent:)	% Sft	1,239.70	47514.00	589,031.06
13	Preparing surface and painting guard bars, gates of iron bars, gratings, railings (including standard braces, etc) and similar open work. (d) (i) Priming coat (ii) Each subsequent coat of paint. (GSI# 5 (d), P# 68) three coats	% Sft	1,270.83	10588.00	134,555.48
Amount of Schedule items in Rs					12,687,590.75
Premium 03 % Above / Below on S.I					380627.72
Total Amount					13068218.47





# Part-II Civil Work Non Schedule Items

S-No	Descriptions	Unit	Rate	Qty	Amount
1	Drilling of boreholes for piles 12 inches diameter in all kind of sub-surface material and water condition including stabilization hole through bentonite slurry if necessary, disposal of surplus excavated material and all work as per drawings and instructions of Engineer incharge. (Maximum 15ft deep) NSI.	P-Rft	400/-	2848.00	1139200/-
2	Making of 2" x 2" cement sand plaster pata/ band/ gola around straight or covered openings and around the edges of walls, columns, beams & roofs etc cement sand mortar 1:3 including cost of labour, curing and cartage etc complete in all respects as per directions of engineer incharge N.S.I	P-Rft	60/-	4018.00	241080/-
3	Providing, fixing and welding MS Grills including embedding and one coat of red oxide etc complete in all respect and detail shown on the drawings. NSI.	P-Kg	130/-	6987.00	908310/-
4	Emblem 2" thick plate size 24" x 24" in pre cast concrete including making and fixing in wall etc complete in all respects as per directions of engineer incharge. N.S.I	P.Each	2800/-	43.00	120400/-
Amount of Non Schedule items in Rs					2408990/-







